


EXmatic 460 electro pneumatic - programmable

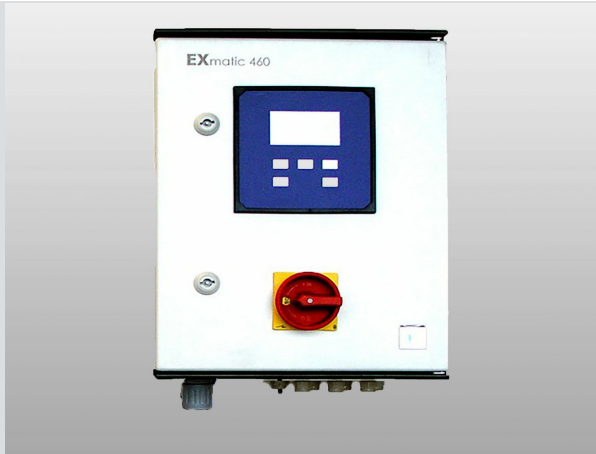


- » Full automatic measuring point
- » High extension of sensor-lifetime and reducing of servicing efforts
- » Safe removal of the sensor under current process conditions
- » Operates with any kind of transmitter, open system
- » Two different cleaning solutions usable
- » Sealing water function
- » Pre- and post-cleaning function

EXmatic 460 is an electro-pneumatic control unit for fully automatic control of pneumatic retractable probe housings of EXtract 8XX series with integrated connection hose for "plug and play" installation and individual programming.

Specifications

Voltage supply	24 V DC / 30VA
Air supply	compressed air 5-6bar
Input for ext. trigger	24 V DC internal power supply for potentialfree contact
Current consumption	0.65 A
Output ext. relays	24 V DC max. 80mA
Output clean. pumps	24 V DC max. 80mA
Output alarm contacts	24 V DC max. 80mA
Housing material	glass-reinforced plastic or stainless steel
Housing dimensions	300 x 400 x 200mm
Ambient temperature	0...+55°C
Type of protection	IP54

Dimensions

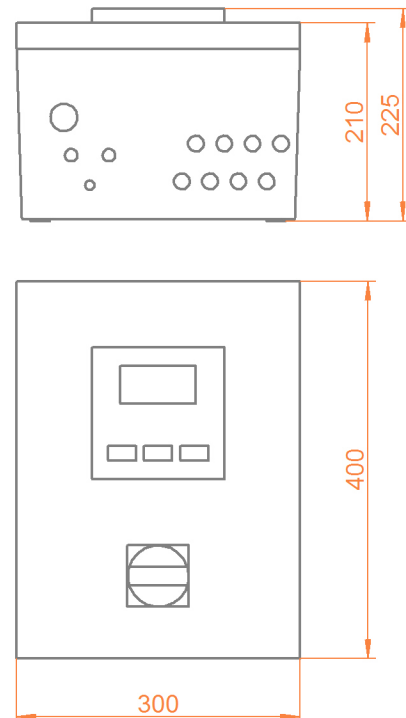

EXmatic 460 electro pneumatic - programmable



Installation on EXtract 820 with flow vessel EXflow720



Usable for industrial applications



Simple connection of all control tubes with EXconnect 150

Ordercode

Code	Housing	Delivery
GF	Plastic housing	2 weeks
SS	Stainless steel housing	2 weeks

Code	Cleaning	Delivery
1	for one cleaning solution	2 weeks
2	for two cleaning solutions	2 weeks

Code	Drain port	Delivery
0	witout	2 weeks
1	with port for drain valve	2 weeks

Code	Length of connecting hose	Delivery
00	without	2 weeks
03	3 meters	2 weeks
05	5 meters	2 weeks
10	10 meters	2 weeks

Code	Fastening angle	Delivery
00	without	2 weeks
EX	for EXtract 8XX	2 weeks