

# EXflow 710 Flow-through fitting - stainless steel / ETFE lined





- » DN25 / 1" or DN50 / 2"
- » Flow direction 90° or 180°
- » Stainless steel AISI 316Ti / 1.4571 or ETFE-lined (conductive version as option)
- » Many different variations
- » Up to 16 bar and 140 °C
- » Version with flange DN50 / 2" on request with PFA-lining (natural or conductive) in stainless steel 1.4571 or steel P235GH (coated)

The flow-through fitting EXflow 710 is an exactly matching accessory for retractable housings. It is especially designed for the product types EXtract 810 and 810M. The sensor is positioned optimally in the process and provides reliable readings.

## Specifications

Material	1.4571 / 316Ti optional ETFE-lined
Process pressure	max. 16 bar
Process temperature	max. 140 °C
Process connection	Flange DN25, ANSI 1", DN50, ANSI 2", welding connection
Sensor connection	Flange DN50, ANSI 2", Thread G1 1/4", G3/4", NPT 3/4"
Flow direction	90° oder 180°

## Dimensions

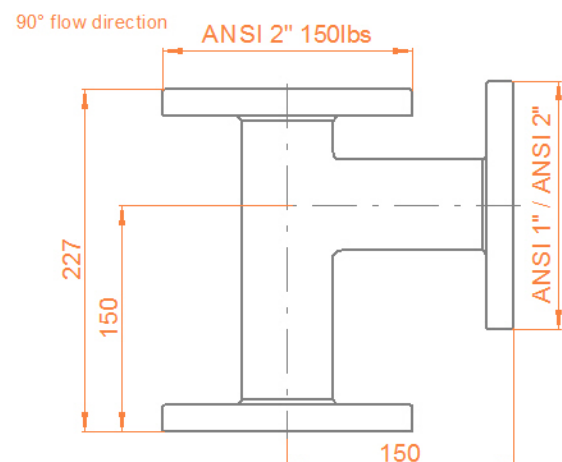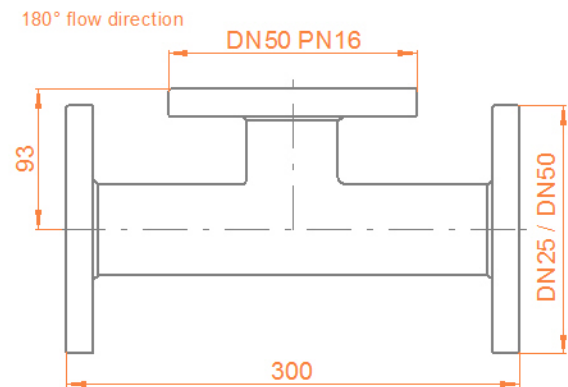

# EXflow 710 Flow-through fitting - stainless steel / ETFE lined



Installation on EXtract 820 with flow vessel  
EXflow720

## Ordercode

Code	Material	Delivery
71	Stainless steel 1.4571 / 316Ti	3 weeks
ET	Stainless steel 1.4571 / 316Ti ETFE lined	6 weeks

Code	Process connection	Delivery
D25	Flange DN 25	3 weeks
D50	Flange DN50 PN16	3 weeks
A10	Flange ANSI 1"	3 weeks
A20	Flange ANSI 2" 150lbs	3 weeks
W25	Welding pipe DN 25/1" (not option "ET")	3 weeks
W50	Welding pipe DN 50/2" (not option "ET")	3 weeks

Code	Holder- /Sensor- connection	Delivery
D50	Flange DN50	3 weeks
A20	Flange ANSI 2"	3 weeks
I25	G1 1/4" socket (not option "ET")	3 weeks
N34	Female thread NPT 3/4" (not option "ET")	3 weeks
G34	Female thread G3/4" (not option "ET")	3 weeks

Code	Flow direction	Delivery
18	180°	3 weeks
09	90°	3 weeks