


EXflow 720 Flow-through fitting - plastics

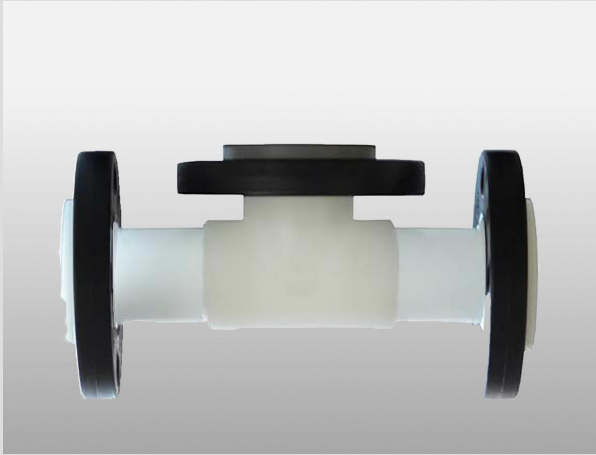



- » Flexible design
- » DN25 / 1" or DN50 / 2"
- » 90° or 180° flow direction
- » Best sensor position
- » Material PVDF
- » High variation of process connections
- » Up to 6 bar and 120 °C

The flow-through fitting EXflow 720 is an exactly matching accessory for retractable housings. It is especially designed for the product types EXtract 820 and 820M. The sensor is positioned optimally in the process and provides reliable readings.

Specifications

Material	PVDF
Process pressure	max. 6 bar
Process temperature	max. 120°C
Process connection	Flange DN25, ANSI 1", DN50, ANSI 2"
Sensor connection	Flange DN50, ANSI 2"
Flow direction	90° oder 180°

Dimensions

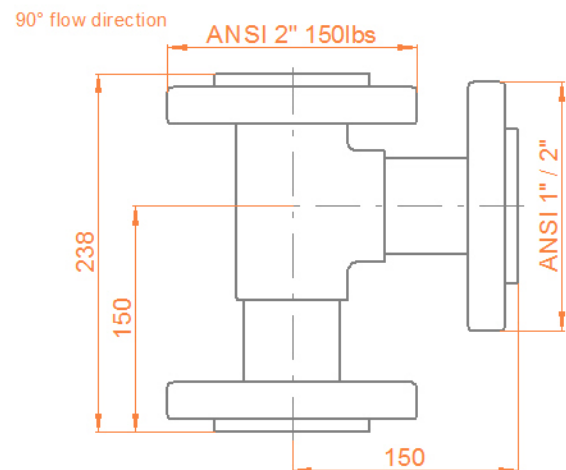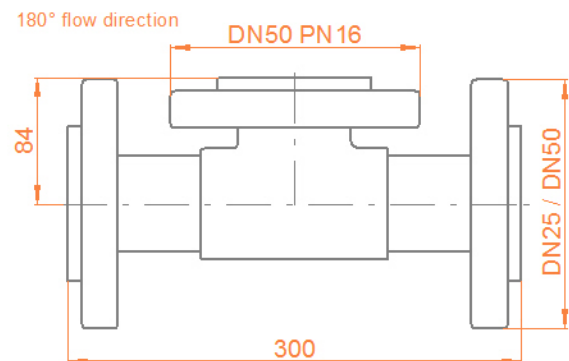

EXflow 720 Flow-through fitting - plastics



Installation on EXtract 820 with flow vessel
EXflow720

Ordercode

Code	Material	Delivery
PV	PVDF	2 weeks

Code	Process connection	Delivery
D25	Flange DN 25	2 weeks
D50	Flange DN50 PN16	2 weeks
A10	Flange ANSI 1"	2 weeks
A20	Flange ANSI 2" 150lbs	2 weeks
W25	Welding pipe DN 25/1"	2 weeks
W50	Welding pipe DN 50/2"	2 weeks

Code	Holder- /Sensor- connection	Delivery
D50	Flange DN50	2 weeks
A20	Flange ANSI 2"	2 weeks

Code	Flow direction	Delivery
18	180°	2 weeks
09	90°	2 weeks